

Splash-proof high quality palm microphone with PTT button. Simple operation with a robust, compact and attractive appearance. Can be delivered with 1,2 m spiral cable or 10 m oil resistant straight cable (UH-M2410). Plug Amphenol C-16-1 (Weather proof). Recommended for Wheelhouse and Control Room consoles, bridge wing stations and general use. To be disconnected in weather exposed areas when not in use, or mounted in protective cabinet




NOTE:

- UH-24 - SPIRAL CABLE 1.5m with OPEN END
- UH-M24 - SPIRAL CABLE 1.5m / 7 PIN PLUG C/16
- UH-M2410 - STRAIGHT CABLE 10m / 7 PIN PLUG C/16
- UH-M24/4 - SPIRAL CABLE 1.5m / 4 PIN PLUG C/16
- UH-M2410/4 - STRAIGHT CABLE 10m / 4 PIN PLUG C/16

FEATURES

- Splash-proof hand microphone with PTT button and holding bracket.
- Handheld microphone for PA and Talk-Back Systems and other applications.
- To be used together with socket box UPA-SB7 or Amphenol C16-1- 7 pin socket
- To be used together with socket box SB-4 or Amphenol C16-1-4 pin socket.

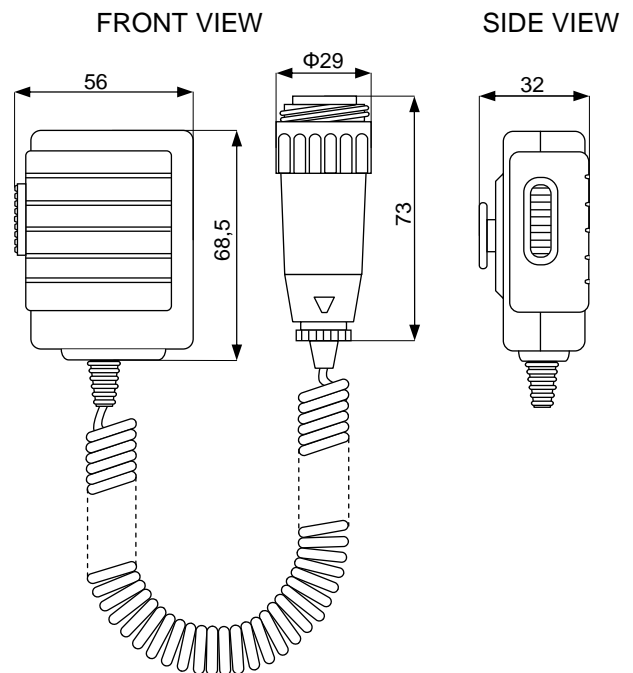

SPECIFICATIONS	
Characteristic	Omni Directional
Frequency range	50 - 5000 Hz
Output level at 1kHz	2,5mV / Pa
Sensitivity	- 52dB +/- 4dB (rel.1V/Pa)
Output Impedance (1KHz)	300 Ohm +/- 30%
Material	ABS and Stainless Steel
Colour	Black
Protection	IP-54
Moisture load	<= 90%
Temperature range	-10°to +50°C
Dimensions (H x W x D)	69 x 56 x 32 mm
Weight	150 grams
Approvals / Compliance	CE

MICROPHONE HOLDER

