

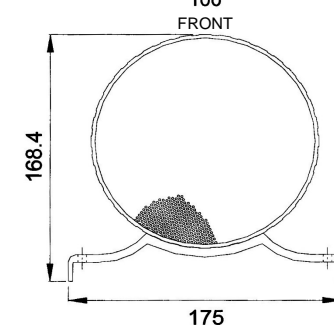
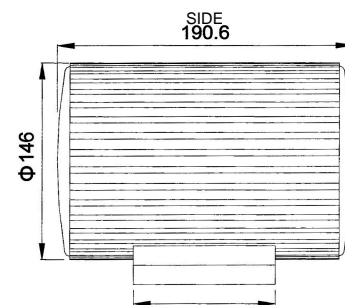
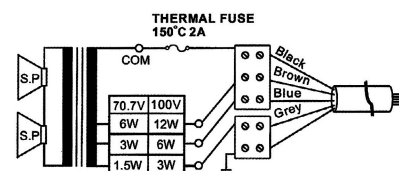
Dual face Projector Loudspeaker of 12 Watt power output with 100V line transformer. The speaker has a modern and appealing appearance in white or silver colour. It is made of extruded aluminium with mounting bracket and grille of aluminium. Recommended for corridors indoor, but can also be used in passageways outdoor due to its high IP rating.


FEATURES

- High quality speaker for alarms, voice paging and music
- Directional sound characteristics with good frequency response
- Easy installation mounting bracket for ceiling or wall
- Flexible fly lead of 1.2m with transformer tapping on cable.
- Silver anodized version (US-5120S)
- Available in alternative colours (Optional)
- Voice Evacuation model (US-5120VA) with ceramic terminal, thermal fuse and fire proof wires in compliance with BS5839 part 8

SPECIFICATIONS

Load rating	2 x 12 W
Impedance	100 V / 8 Ω
Transformer tapplings	12 / 6 / 3 / 1.5 / 0.75 W
Frequency range	130 - 20000 Hz
Sound pressure at 1W / 1m	88 dB
SPL Pmax/1m	98 dB
IP rating	IP-66
Dimensions (Φ x L x H)	146 x 190.6 x 168.4 mm
Weight	Approx. 2.7 kg
Colour	White, Silver Anodized
Material Housing	Extruded Aluminium
Grille	Aluminium
Approvals/ Compliance	CE BS 5839 (Optional)


THERMAL FUSE CONNECTION
150°C 2A

STANDARD CONNECTION
